


# City of Maple Valley SR 169 Widening Phase I Roadway Improvements Project (Witte Road SE to SE 240<sup>th</sup> Street) T-39

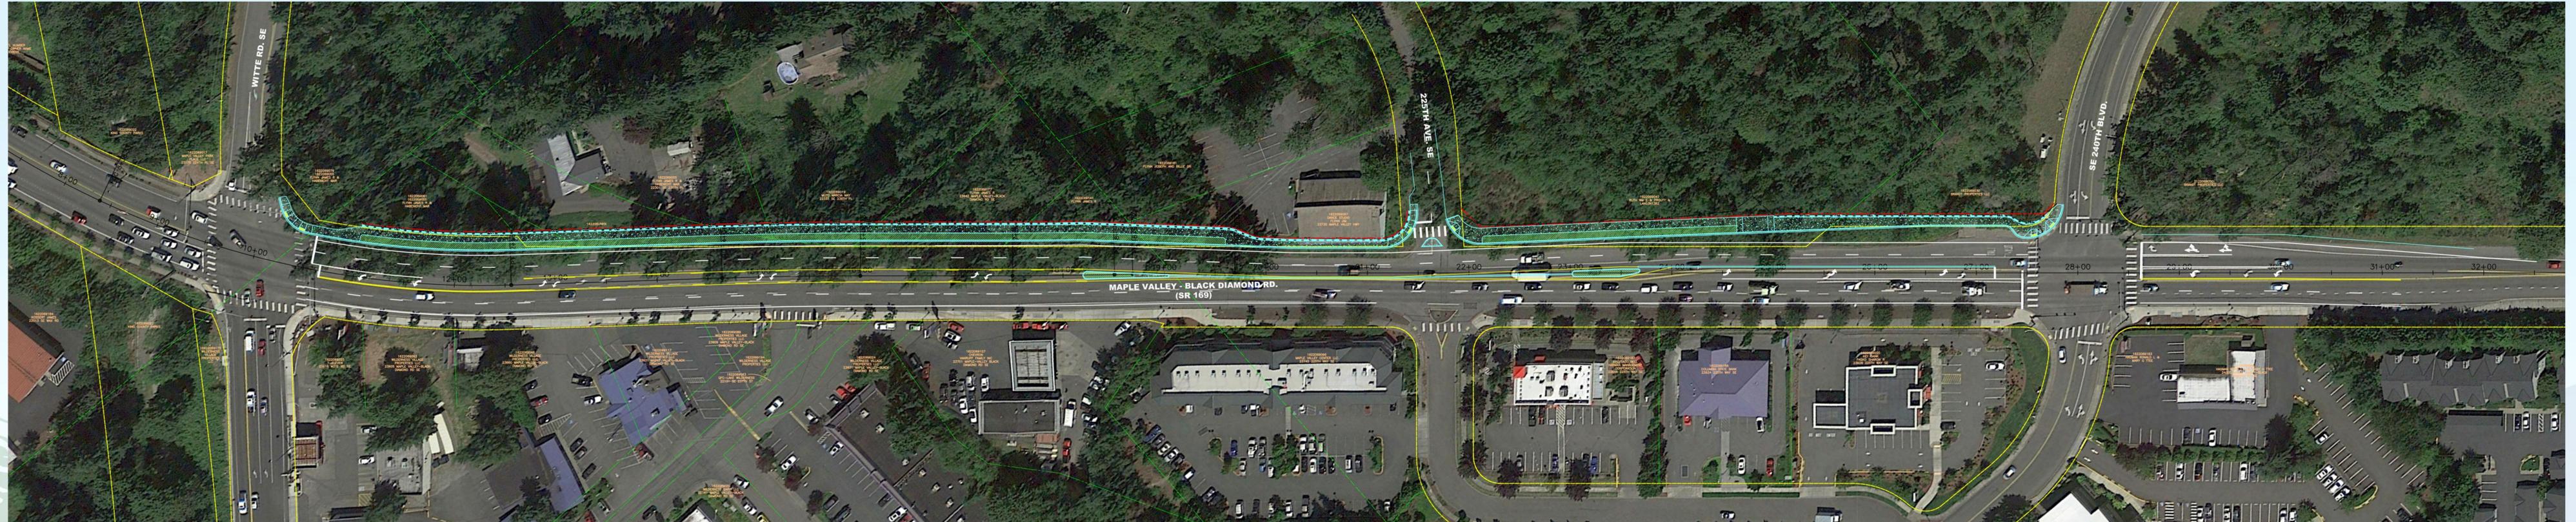

### The project will include:

- Curb, gutter, landscape strip, 6-8' wide sidewalk, intermittent retaining wall, and bicycle lane on east side of SR 169
- A second northbound travel lane; center/left turn lane and planted median where warranted
- Water quality treatment and stormwater flow control using Low Impact Development facilities
- ADA compliant curb ramps at SE 240th and Witte Road SE crossings
- Channelization improvements along SR 169 and along SE 240th Street at SR 169

### Project Objective

- Complete a 5-lane multimodal transportation facility
- Decrease congestion and address known major development (6,000+ homes) in an outside jurisdiction
- Provide additional capacity and improved safety

### Project Milestones

- Final Design Completed- Spring 2018
- Project Advertised - Spring 2018
- Construction Begin - Summer 2018

### Project Costs and Funding

- Funded by State construction grants, developer contributions, and the City's tax revenues (surface water management fund, transportation impact fee fund, and real estate excise tax fund)
- Project cost of \$6.35 million includes design, permitting, right-of-way acquisition, and construction

Project Manager: Scott Tkach, PE, City of Maple Valley

