

ADDENDUM NO. 3

SR 169 Widening Phase 1 Roadway Improvements
Witte Road SE to SE 240th Street
City Project T-39
TIB Project 8-1-205(005)-1

Date: February 15, 2019
To: All Plan and Specification Holders
From: Scott Soiseth, P.E.
Subject: SR 169 Widening Phase 1 Roadway Improvements
Date of Bid Opening: February 19, 2019

Notice to all Plan Holders:

This Addendum No. 3, containing the following revisions, additions, deletions, and/or clarifications dated February 15, 2019, is hereby made part of the Plans and Specifications (Contract Documents) for the SR 169 Widening Phase 1 Roadway Improvements – Witte Road SE to SE 240th Street – City Project T-39 and TIB Project 8-1-205(005)-1. Bidders shall take this Addendum into consideration when preparing and submitting their bids.

Contractors shall acknowledge receipt of this Addendum in the place provided on Bid Proposal Signature Page P-7. Failure to do so may disqualify the Bidder from consideration of its bid.

All other requirements of the contract documents remain in effect.

A. Revisions to Contract Provisions

- 1) The following revisions to Bid Proposal are as follows:
 - a. The quantity for Bid Item 76 (Quarry Spalls) shown on Bid Proposal Page P-4 shall be revised to **175 TONS**.

B. Clarification to Plans

- 1) Sheets 71 and 73 –Traffic Signal Plan and Traffic Signal Notes: Replacement of sheets to show updated Signal Display Note 5 (on SG02) and updated Construction Pole Notes 4 & 8 (on SG04) to reflect that relocated pedestrian signal heads on new PS poles shall be installed on new Type D mounts.

LEGEND


EXISTING	PROPOSED	
-	—	CONDUIT
—	—	MAST ARM MOUNTED SIGN
—	—	VEHICLE HEAD
—	—	PEDESTRIAN HEAD
—	—	EVP DETECTOR
—	—	PEDESTRIAN POLE
—	—	SIGNAL POLE WITH LUMINAIRE
—	—	JUNCTION BOX TYPE 1
—	—	JUNCTION BOX TYPE 2
—	—	JUNCTION BOX TYPE 8
—	—	POLE CONSTRUCTION NOTE
—	—	CONSTRUCTION NOTE
—	—	SIGN NOTE
—	—	WIRE NOTE

GENERAL NOTES

- FOR SIGNAL NOTES, SEE SHEET SG04.
- FOR POLE SCHEDULE, SEE SHEETS SG03.
- FOR CONDUIT WIRE SCHEDULE SEE SHEET SG04.
- FOR CHANNELIZATION PLANS, SEE SHEETS CH01-CH06.
- FOR SIGNAL SIGNING, SEE SHEETS SG04.
- FOR ILLUMINATION PLANS, SEE SHEETS IL01-IL06 AND ILDT01.
- SEE SG02 FOR APS SPEECH MESSAGES.
- EXISTING SIGNAL CONDUIT RUNS HAVE BEEN IDENTIFIED IN THE FIELD WITH WSDOT SIGNAL TECHNICIANS.
- ANY EXISTING JUNCTION BOX NOT REPLACED AS PART OF THESE PLANS BUT WILL BE UTILIZED FOR NEW CONDUCTORS MUST BE GROUNDED AND BONDED. REFER TO WSDOT STD. PLAN J-40.05-00 FOR RETROFIT GROUNDING DETAILS

SEC.16, T.22N. R.6E. W.M.

SIGNAL PHASE DIAGRAM

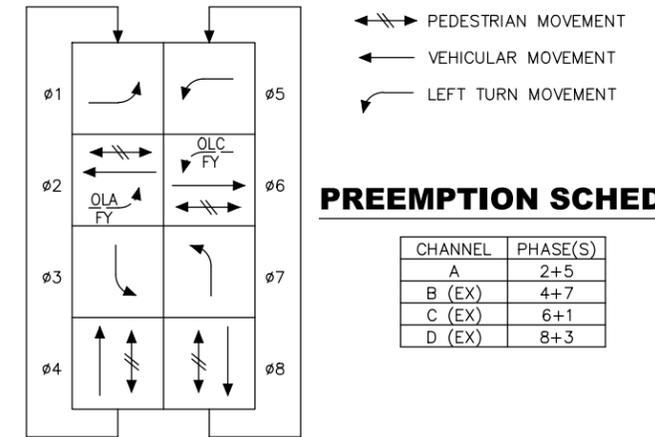


PREEMPTION SCHEDULE

CHANNEL	PHASE(S)
A	2+5
B (EX)	4+7
C (EX)	6+1
D (EX)	8+3

SIGNAL DISPLAY NOTES

- ALL VEHICLE SIGNAL HEADS SHALL HAVE BACKPLATES AND TUNNEL VISORS. ALL BACKPLATES SHALL BE BLACK, LOUVERED, WITH 1" REFLECTIVE TAPE.
- ALL VEHICLE AND PEDESTRIAN SIGNAL HEADS SHALL HAVE LIGHT EMITTING DIODES (LED).
- ALL PEDESTRIAN SIGNAL HEADS SHALL BE COUNTDOWN HEADS.
- ALL VEHICLE SIGNAL HEADS ON MAST ARMS SHALL USE TYPE M MOUNTING PER WSDOT STD. PLAN J-75.20-01.
- PEDESTRIAN SIGNAL HEADS MOUNTED TO TYPE I, TYPE II, OR TYPE III TRAFFIC SIGNAL POLES SHALL USE TYPE E MOUNTING PER WSDOT STD. PLAN J-75.10-02. PEDESTRIAN SIGNAL HEADS MOUNTED TO PS POLES SHALL USE TYPE D MOUNTING PER WSDOT STD. PLAN J-20.16-02.
- ALL MAST ARM MOUNTED SIGNS SHALL BE INSTALLED PER STD. PLAN G-30.10-04.

SIGNAL DISPLAYS

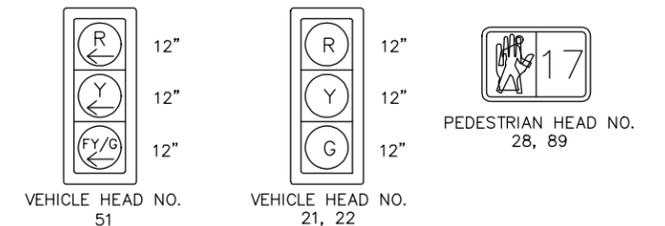

APS SPEECH MESSAGE

APS SPEECH MESSAGE – CROSSING SE 240TH STREET
 –"TWO HUNDRED FORTIETH STREET. WALK SIGN IS ON TO CROSS TWO HUNDRED FORTIETH STREET"

APS SPEECH MESSAGE – CROSSING SR 169 (MAPLE VALLEY-BLACK DIAMOND ROAD)
 –"HIGHWAY ONE SIXTY NINE. WALK SIGN IS ON TO CROSS HIGHWAY ONE SIXTY NINE"

CALL 48 HOURS BEFORE YOU DIG
1-800-424-5555



Aow 02/15/19 10:35am - P:\MAPLO0000002\0400CAD\T\SHEETS\TSG01MAPLO002.dwg

Supervisor	Designed By	Checked By	Detailed By	REVISION	BY	APP'D	REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
S. SOISETH	A. WILEN	M. FELIBERTI	O. AHRENSFELD				AW	WASH			



DAVID EVANS AND ASSOCIATES INC.
 14432 SE Eastgate Way, Suite 400
 Bellevue Washington 98007
 Phone: 425.519.6500



**SR 169 WIDENING
 PHASE 1 ROADWAY IMPROVEMENTS
 WITTE ROAD SE TO SE 240TH STREET**

TRAFFIC SIGNAL PLAN

SG02
 SHEET 71 OF 103 SHEETS

